

34.0-37.0	17.0 - 20.0	Balance*	0.08 max.	0.75 - 1.50	2.0 max.	0.030 max.	0.030 max.
-----------	-------------	----------	-----------	-------------	----------	------------	------------

0.292 lb/in<sup>3</sup>  
8.08 g/cm<sup>3</sup>

0.11 BTU/lb/°F (32 - 212°F)  
460 Joules/kg/°C (0 - 100°C)


1.02 at 70°F/20°C (RT)

75	24	86	12.4	612	1.017
400	204	108	15.6	649	1.079
800	427	134	19.3	688	1.144
1200	649	162	23.4	721	1.199
1600	871	198	28.6	744	1.237
1800	982	216	31.2	749	1.245

.....B 536  
.....SB 536  
.....5592



高温机械性能  
退火材料的拉伸性能

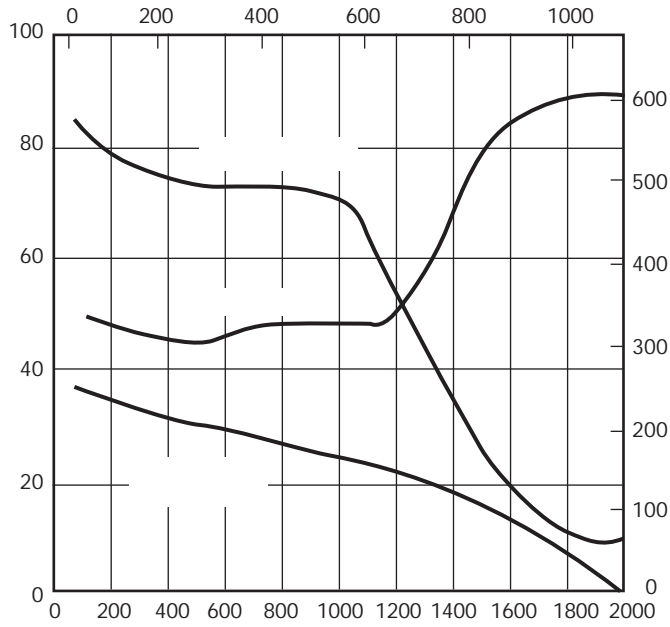

耐腐蚀性

合金330具有优异的耐腐蚀性能，特别是对氧化、渗碳和



SANDMEYER  
STEEL COMPANY